



Walk way paved with well bruned clay bricks

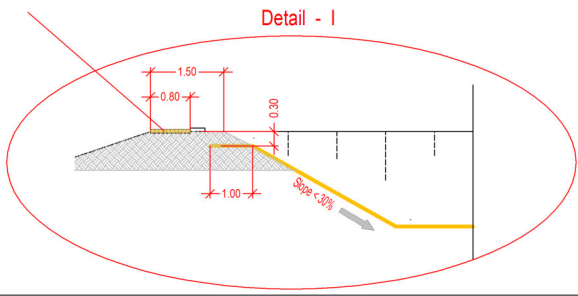

Detail - II

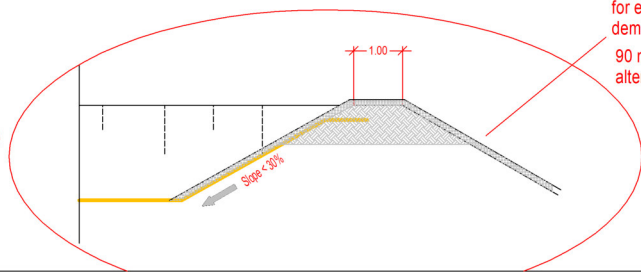

Perforated concrete pavement blocks for easy desludging without damaging the dame liner
90 m² alternative brick pavement



Notice:

1. This is the property of BORDA and is not be copied or produced anywhere without permission of BORDA
2. All dimensions are in [m] unless mentioned otherwise
3. Dimensions related with the structural design are not given in this layout drawings
4. All dimensions have to be checked and co-related with the structural design and any discrepancy or omission shall be brought to the notice
5. According to the DEWATS quality management all indicated tolerances have to be kept and will be checked on site

Legend:

- WL - Water level
- GL - Ground level
- BL - Bottom level
- BR - Baffled Reactor
- PGF- Planted gravel filter
- ABR- Anerobic baffled reactor
- PBL- Pipe inner bottom level

BORDA
Bremen Overseas Research and Development Association

Am Deich 45
D-28199 Bremen, Germany

www.borda.org

	Date:	Name:
Work out:	06/09/2019	
Proved:		
Scale:		
File:	OXFAM_CxB_Phase 2	
Document:	DR 5.3	
Project phase:	Detail Engineering	
Client:	Oxfam Bangladesh	
Title:		
Planted drying bed - construction measurements		
Project:		
OXFAM-CxB FSPT Phase II		